



PILECO INC.

936.494.4200 tel

Sales@Pileco.com

www.Pileco.com

491 Conroe Park W. Dr. • Conroe, TX 77303

Specifications: **V-23-Bv** Uses 350P Power Pack

	A	2546 mm	100 in.
	B	1112 mm	44 in.
	C	200 mm	7.87 in.
	D	271 mm	10.7 in.
	E	0-37 mm	0-1.46 in.
	F	490 mm	19.3 in.
	G	486 mm	19.1 in.
	H	1566 mm	61.7 in.
	I	2271 mm	89.4 in.
	J	310 mm	12.2 in.

Specifications

Eccentric moment	23 kg.m/s	1,996 lb.in/s
Max. centrifugal force	645 kN	72.5 ton
Max. frequency	1600 RPM	1600 VPM
Max. amplitude excl. clamp	19.5 mm	0.77 in.
Max. amplitude inc clamp	16 mm	0.63 in.
Max. static line-pull	360 kN	40.5 ton
Max. hydraulic power	193 kw	262 hp
Max. operating pressure	340 bar	4931 psi
Max. oil flow	340 l/min	169 gal./min
Dyn. weight excl. clamp	2350 kg	5180 lbs.
Dyn. weight incl. clamp	2840 kg	5467 lbs.
Total weight incl. clamp	4390 kg	9678 lbs.
Transport weight	4740 kg	10450 lbs.
Hose length	45 m	150 ft.


Clamps

160 Clamps

Force	1425 kN	160 ton
Weight	965 kg	2127 lbs.
Opening	50 mm	1.97 in.
L x W x H	1186 305 640 mm	
L x W x H	46.7 12.0 25.2 in.	

Specifications: V-23-Bv Uses 350P Power Pack

P350 Power Pack

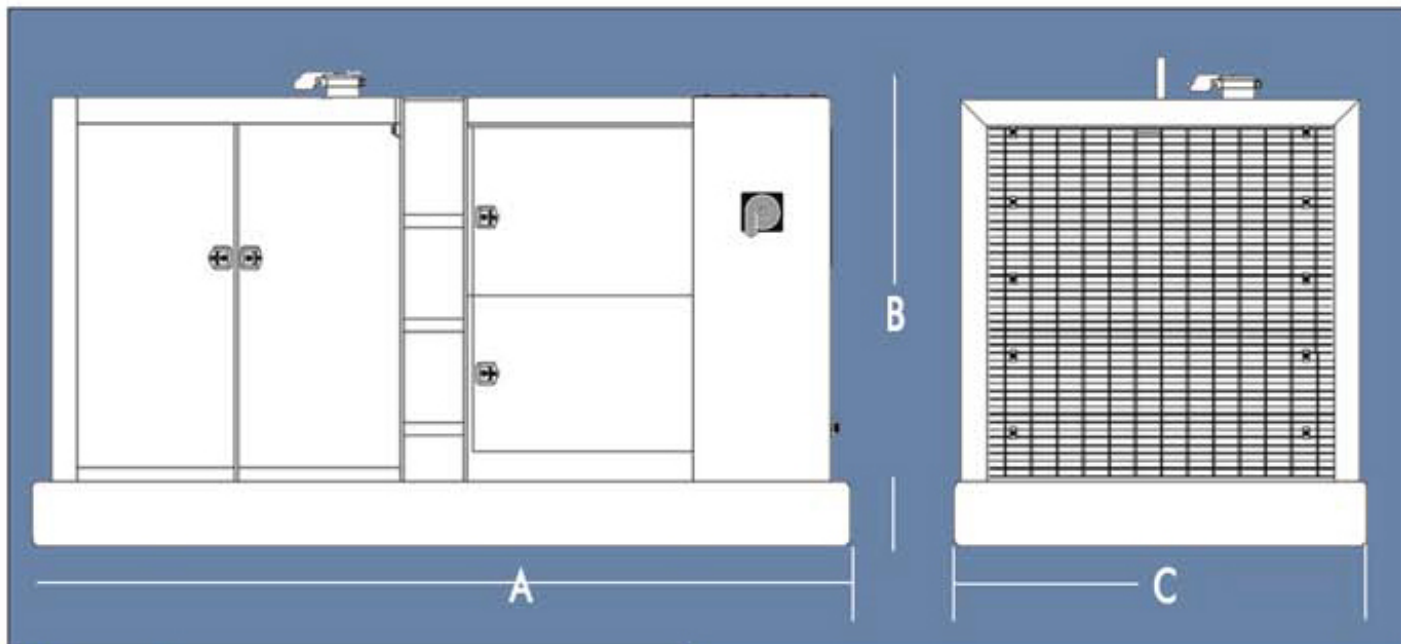

Dimensions

A	4000 mm	158 in.
B	1940 mm	76.5 in.
C	1650 mm	65 in.

Specifications

Diesel Engine	Caterpillar C9	
Max. theoretical power	250 kW	335 HP
Max. frequency	2100 RPM	2100 VPM
Max. working pressure	350 bar	5076 psi
Hydraulic pump	Rexroth A11VLO260/60	
Max. oil flow	410 l/min	108 gal./min
Diesel fuel	650 l	172 gal.
Hydraulic oil	1200 l	317 gal.
Weight	5600 kg	12345 lbs.