




**U-style  
Swinging Leads – Intermediate Section 40ft**

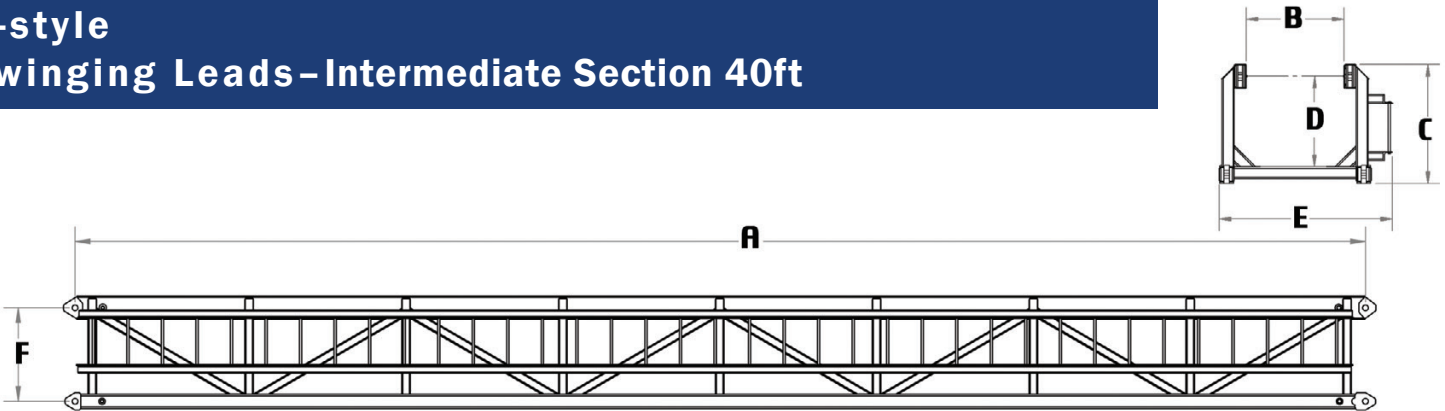

**Standard Units**

\*Lengths are pin to pin, ± .5"

**\*approximate weights**

Pin Style	*A	F	B	C	D	E	*Weight p/ft	Diesel Hammer
<b>U-21 2140I</b>	37' 5"	30.8 in	21.5 in	35 in	27 in	45 in	105 lbs./ft.	D19-42
<b>U-26 2640I</b>	37' 5"	32.5 in	26.5 in	39 in	30 in	51.5 in	140 lbs./ft.	D30-32
<b>U-32 3240I</b>	37' 5"	32.5 in	32.5 in	39 in	30 in	58 in	150 lbs./ft.	D62-32
<b>U-42 4240I</b>	37' 5"	45.5 in	42.5 in	52 in	34 in	68.5 in	200 lbs./ft.	D138-32
<b>U-48 4840I</b>	37' 5"	51.5 in	48.5 in	58 in	37 in	74.5 in	225 lbs./ft.	D180-32
<b>U-54 5440I</b>	37' 5"	51.5 in	54.5 in	58 in	37 in	74.5 in	270 lbs./ft.	D180-32
<b>U-66 6640I</b>	37' 5"	54 in	66.5 in	61 in	43.5 in	92.5 in	350 lbs./ft.	D180-32

**Metric Units**

\*Lengths are pin to pin, ± 12.7mm

Pin Style	*A	F	B	C	D	E	*Weight kg/m	Diesel Hammer
<b>U-21 2140I</b>	11.40 m	78.2 cm	54.6 cm	88.9 cm	68.6 cm	114.3 cm	47.63 kg/m	D19-42
<b>U-26 2640I</b>	11.40 m	82.6 cm	67.3 cm	99.1 cm	76.2 cm	130.8 cm	63.5 kg/m	D30-32
<b>U-32 3240I</b>	11.40 m	82.6 cm	82.6 cm	99.1 cm	76.2 cm	147.3 cm	68 kg/m	D62-32
<b>U-42 4240I</b>	11.40 m	115.6 cm	108 cm	132.1 cm	86.4 cm	174 cm	91 kg/m	D138-32
<b>U-48 4840I</b>	11.40 m	130.8 cm	123.2 cm	147.3 cm	94 cm	189.2 cm	102 kg/m	D180-32
<b>U-54 5440I</b>	11.40 m	130.8 cm	138.43 cm	147.3 cm	94 cm	189.2 cm	122.5 kg/m	D180-32
<b>U-66 6640I</b>	11.40 m	137 cm	169 cm	155 cm	110.5 cm	235 cm	159 kg/m	D180-32