




Specifications: D 25-32 Diesel Pile Hammer

Dimensions approx:

Length of Hammer:	A1	5420 mm	17' 9" ft
Hammer length w/starter guides:	A	6477 mm	21' 3" ft
Outer diameter of impact block:	B	560 mm	1' 10" ft
Min. Guiding Width:	C	660 mm	26" in
Width of hammer:	D	640 mm	25" in
Hammer Center to Pump Guard:	F	405 mm	1' 4" ft
Hammer Center to Trip:	G	439 mm	1' 5" ft
Hammer Depth:	H	844 mm	2' 9" ft

Pump Setting 1	39.9 kNm	29,484 ft.lbs.
Pump Setting 2	58.5 kNm	38,830 ft.lbs.
Pump Setting 3	71.1 kNm	52,470 ft.lbs.
Pump Setting 4	78.9 kNm	58,245 ft.lbs.

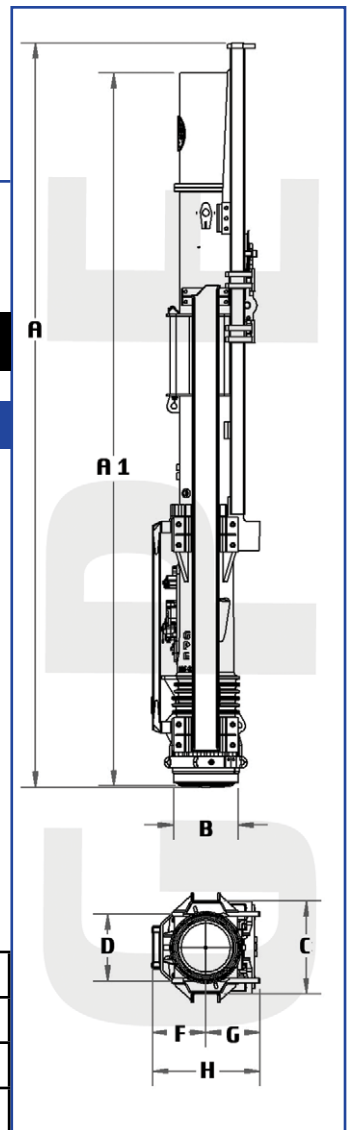

Weights approx:

Weight of diesel pile hammer approx.:	7.56 US tons	15,113 lbs
Weight of piston approx.:	2500 kg	5,511.6 lbs
Impact Block approx.:	662 kg	1,459 lbs
Tripping device approx.:	240 kg	529.1 lbs
Tool box approx.:	100 kg	220.5 lbs

Energy per blow

Max:	78.9 kNm	58,245 ft lbf
Min:	39.9 kNm	29,484 ft lbf
Number of blows:		37-52 min

Batter Info

Max. gradient of batter pile driven:	1:3/1:1
--------------------------------------	---------

Consumption

Diesel fuel:	8 L hr.	2.1 gph
Lubrication oil:	1 L hr.	0.26 gph

Volume

Diesel oil tank:	67 L	17.7 gal
Lube tank:	19 L	5 gal